

## PCB RELAY



**JZC-22F**

### Contact specification

Contact form	1H, 1Z
Contact resistance	$\leq 100\text{m}\Omega$ ( 1A 6VDC )
Contact material	AgCdO AgSnO <sub>2</sub>
Contact capacity	15A 250VAC/28VDC 12A 250VAC/28VDC5A 5A 250VAC/28VDC

### Coil specification


Rated coil power	360mW/530mW
------------------	-------------

### Coil data


Nominal voltage	Operate voltage	Release voltage	Coil resistance
VDC	VDC	VDC	$\Omega \pm 10\%$
3	2.25	0.3	25
5	3.8	0.5	70
6	4.5	0.6	100
9	6.8	0.9	225
12	9.0	1.2	400
18	13.5	1.8	900
24	19.0	2.4	1600
48	36.0	4.8	4500

### Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

JZC-22F Outline dimension

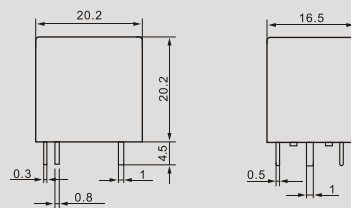

JZC-22F Mounting holes (Bottom view)

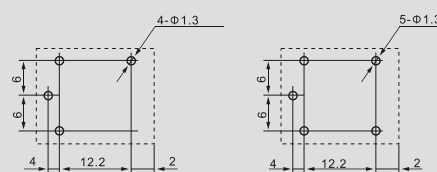

JZC-22F Wiring diagram (Bottom view)

