

PCB 继电器	TRA5
----------------	-------------

- 2 form A contact arrangements
- Immersion cleanable, sealed version available
- Meet 4,000V dielectric voltage between coil and contacts
- Meet 5,000V surge voltage between coil and contacts(1.2/50ms)
- Conform to RoHS,ELV directive



FU US E173485

ORDERING CODE 订购代码

<u>TRA5</u>	<u>D</u>	—	<u>12VDC</u>	—	<u>S</u>	—	<u>2H</u>
1	2		3		4		5
1. Relay Model 继电器型号			3. Coil Nominal Voltage 线圈额定电压 3,5,6,9,12,24,48VDC		4. S: Sealed 密封		5. 触点转换形式 2H: Form 2A

COIL DATA 线圈参数 (at 20°C)

Nominal Voltage 额定电压(VDC)	3	5	6	9	12	24	48	
Coil Resistance 线圈阻值 (Ω ±10%)	36	100	144	324	576	2304	9216	0.25W
Rated Current 额定电流(mA)	83	50	42	28	21	10	5	
Max Operate Voltage 最大吸合电压(VDC)	2.25	3.75	4.5	6.75	9	18	36	
Min Release Voltage 最小释放电压(VDC)	0.3	0.5	0.6	0.9	1.2	2.4	4.8	
Coil Resistance 线圈阻值(Ω ±10%)	17	46	67	150	270	1050	4250	0.54W
Rated Current 额定电流(mA)	180	108	90	60	45	22.5	11.3	
Max Operate Voltage 最大吸合电压(VDC)	2.25	3.75	4.5	6.75	9	18	36	
Min Release Voltage 最小释放电压(VDC)	0.3	0.5	0.6	0.9	1.2	2.4	4.8	
Max Applicable Voltage 最大过载电压	70°C时额定电压的130%，23°C时额定电压的170%							

CONTACT DATA 触点参数

Contact Form 触点形式	2H
Contact Material 触点材料	Silver Alloy
Load 负载	Resistive load(COS Φ=1)
Contact Ratings 触点负载	5A 250VAC/30VDC TV-3(3A@120VAC)
Minimum load 最小负载	100mA 5VDC
Max Switching Voltage 最大转换电压	250VAC/30VDC
Max Switching Current 最大转换电流	7A
Max Switching Power 最大转换功率	1250VA/150W
Contact Resistance 接触电阻	100mΩ Max at 6VDC 1A
Life Expectancy 寿命	Electrical 电气寿命: 100,000 Operations(at30Operations/minute)
	Mechanical 机械寿命: 10,000,000 Operations(at3000Operations/minute)





■ CHARACTERISTICS DATA 性能参数

Insulation Resistance 绝缘阻值	100M Ω Min at 500VDC
Dielectric Strength Between Open Contacts 触点间耐压	1000VAC(for one minute)
Between Contacts and coil 触点与线圈间耐压	4000VAC(for one minute)
Operate Time 吸合时间	20ms
Release Time 释放时间	10ms
Temperature Range 环境温度	-40 $^{\circ}$ C to +70 $^{\circ}$ C
Shock Resistance 冲击	Operating Extremes 动作极限: 10G
	Damage Limits 破坏极限: 100G
Vibration Resistance 振动	10-55Hz, 1.5mm
Max. switching frequency 最大转换频率	Mechanical: 18,000operations/hr
	Electrical: 1,800operations/hr
Humidity 湿度	20-85%
Weight 重量	Approx 13g
Safety Standard 安全标准	UL cUL


■ APPROVED STANDARDS 安全标准

Model(型号)	Coiling rating (线圈电压)	Safety Standard (安全标准)	Contact rating (触点负载)
TRA5	3 to 48VDC	UL/cUL	5A 250VAC
			5A 30VDC
			TV-3 3A 120VAC

■ ENGINEERING DATA 设计参数

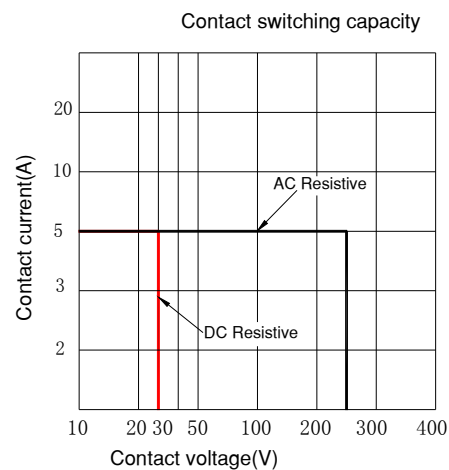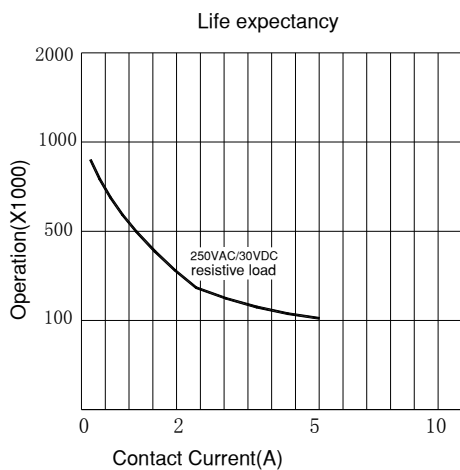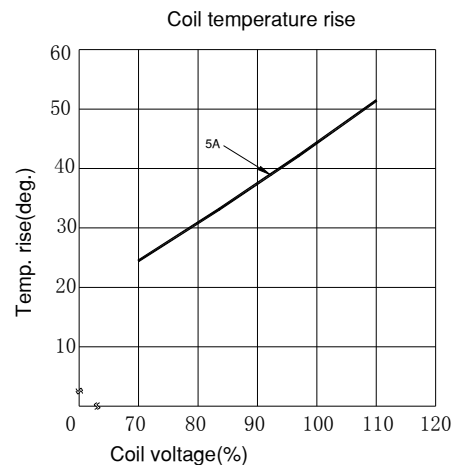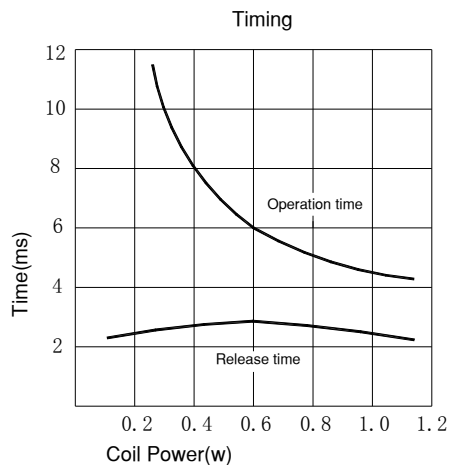

■ OVERALL AND MOUNTING DIMENSIONS 安装图

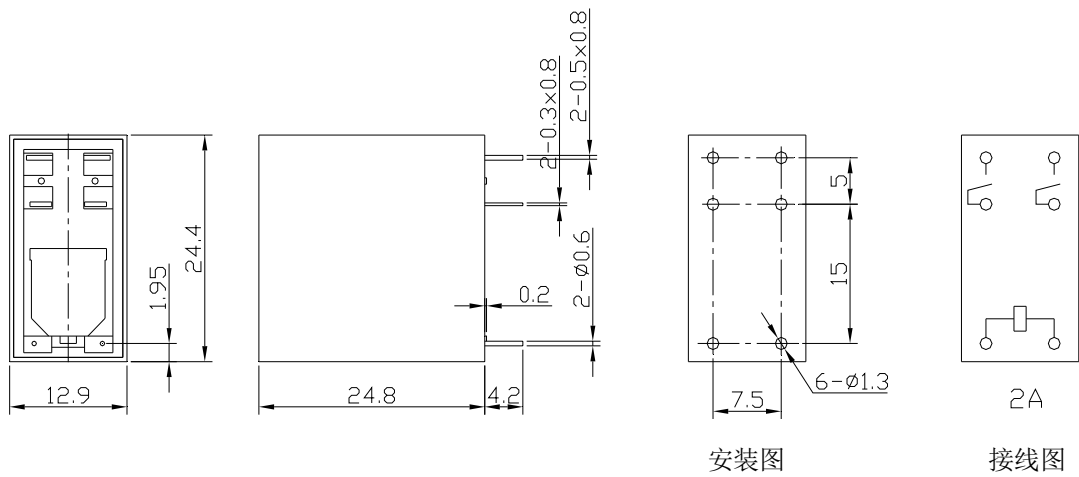

- 备注：1) 产品部分外形尺寸中未注尺寸公差：当外形尺寸 \leq 1mm时，公差为 \pm 0.2mm；当外形尺寸在1~5mm时，公差为 \pm 0.3mm；当外形尺寸 $>$ 5mm时，公差为 \pm 0.4mm。
- 2) 安装孔尺寸中未注尺寸公差均为 \pm 0.1mm。